

3M™ Novec™ 7600 Engineered Fluid

Introduction

3M™ Novec™ 7600 Engineered Fluid is a new fluid with low global warming potential designed for use in heat transfer applications. Novec 7600 fluid shares many of the inertness and dielectric properties of perfluorocarbons (PFCs) and perfluoropolyethers (PFPEs), and is a viable option for replacing them in a wide array of applications.

A unique heat transfer fluid with favorable environmental properties

Semiconductor

This Novec fluid can be used in cooling of ion implanters, dry etchers and CVD machines in semiconductor manufacturing facilities.

Test Equipment

The fluid may be used to cool semiconductor thermal shock and test equipment.

Electronic Cooling

Due to compatibility with most electronic components and dielectric strength, Novec 7600 fluid can be used in single and two-phase cooling of supercomputers, sensitive military electronics and also high voltage transformers and power electronics.

Industrial/Pharmaceutical

Novec 7600 fluid can also be used as an alternative to commonly used heat transfer fluids in pharmaceutical and chemical process cooling.


The primary advantage of Novec 7600 fluid over a comparable PFC or PFPE, however, is reduced Global Warming Potential (GWP). Novec 7600 fluid has been developed as a low-GWP alternative to perfluorocarbon and perfluoropolyether heat transfer liquids. Novec 7600 fluid is also non-ozone-depleting.

Typical Physical Properties

Not for specification purposes. All values @ 25°C unless otherwise specified.

Properties	3M™ Novec™ 7600 Engineered Fluid
Boiling Point (°C)	131
Pour Point (°C)	-98
Molecular Weight	346
Boiling Point (°C) @ 760 mmHg	98.0
Freeze Point (°C)	-38
Liquid Density (g/ml)	1540 kg/m ³
Coefficient of Expansion	0.00114 K ⁻¹
Latent Heat of Vaporization @ 1 atm. (kJ/kg)	115.6
Surface Tension (dynes/cm)	17.7
Kinematic Viscosity (cSt)	1.07
Critical Temperature (°C)	260
Critical Pressure (Mpa)	1.67
Solubility of Solvent in Water (ppb)	<10 ppm by weight
Solubility of Water in Solvent (ppb)	410 ppm by weight
Dielectric Strength, 2.54 mm gap (kV)	31
Volume Resistivity	3 x 10 ¹⁰ ohm-cm
Dielectric Constant	6.4



Novec 7600 Fluid Kinematic Viscosity

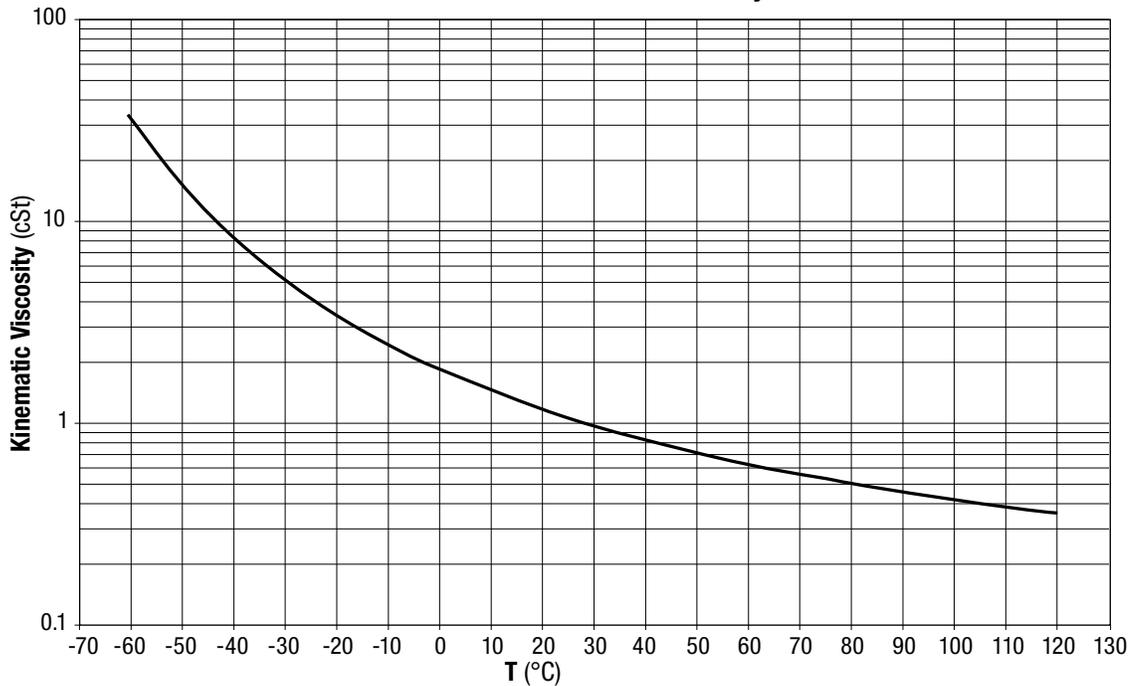


$$\text{Kinematic Viscosity, centistokes} = \text{EXP} (464.403382 / (T[^\circ\text{C}] + 133)) - 2.881482$$

Typical Physical Properties

Not for specification purposes. All values @ 25°C unless otherwise specified.

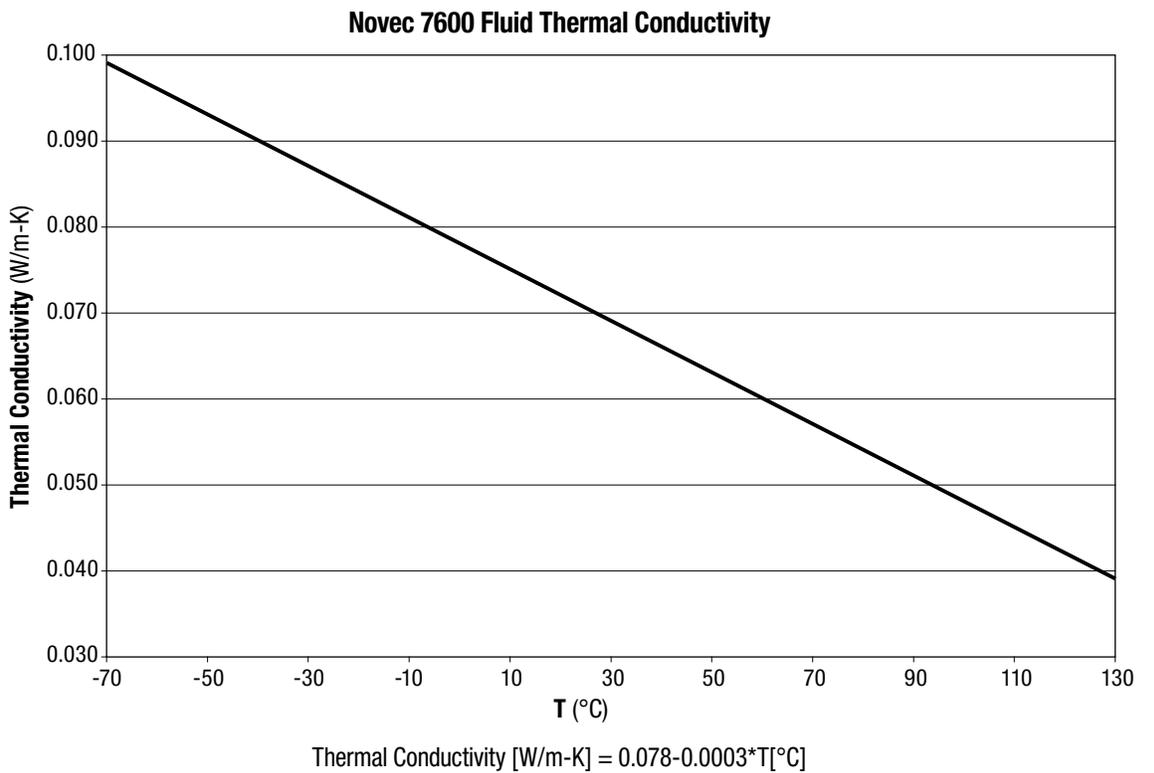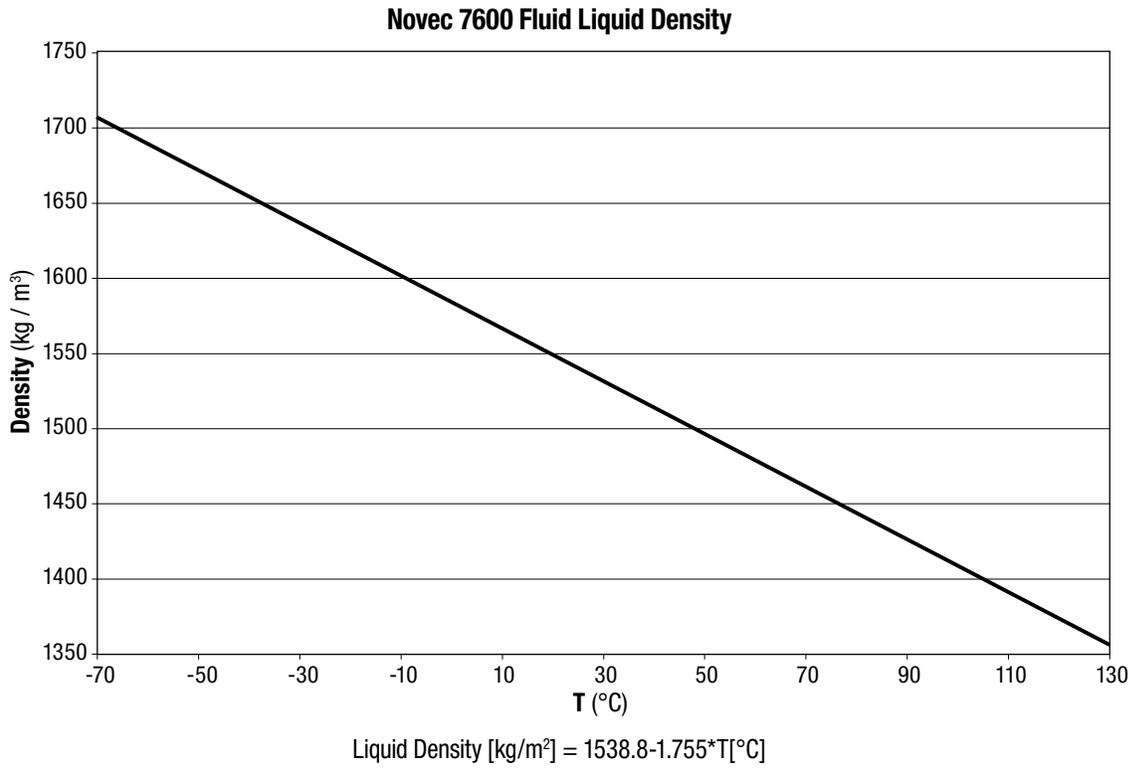

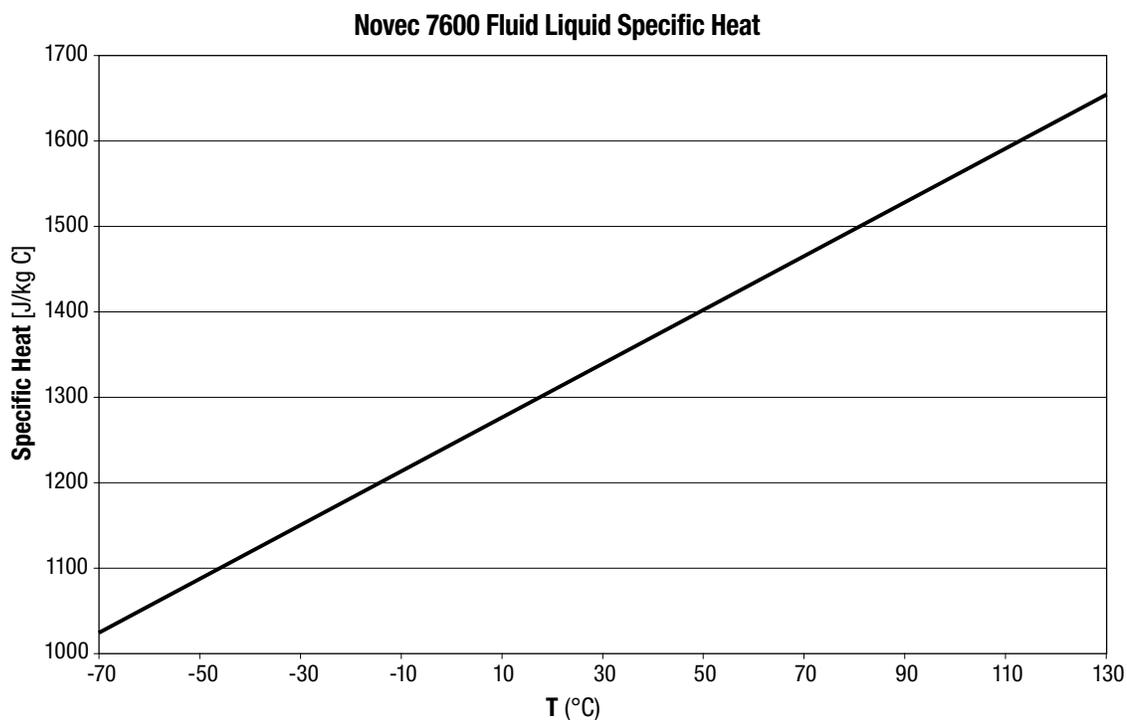

$$\text{Liquid Specific Heat [J/kg-K]} = 3.1631 * T[^\circ\text{C}] + 1240.2$$

Toxicity Profile

Not for specification purposes.

3M™ Novec™ 7600 Engineered Fluid indicates very low overall toxicity. The LD50 (rat) is greater than 2000 mg/kg and the results of a 28-day repeated dose oral toxicity study in rats also indicate low repeat dose toxicity. Novec 7600 fluid is expected to be minimally irritating to the eyes and skin and was negative in the two mutagenicity studies conducted.

Environmental Properties

Properties	3M™ Novec™ 7600 Engineered Fluid
Ozone Depletion Potential—ODP ¹	0.0
Global Warming Potential ²	700
Atmospheric Lifetime (years)	9
Flammability	Nonflammable
Flammability Range in Air	2.9-8.8%

¹ CFC-11 = 1.0

² GWP—100 year ITH, CO₂ = 1.0

Environmental, Health and Safety

Before using this product, please read the current product Material Safety Data Sheet (available through your 3M sales or technical service representative) and the precautionary statement on the product package. Follow all applicable precautions and directions.

3M™ Novec™ 7600 Engineered Fluid is nonflammable and is resistant to thermal breakdown and hydrolysis during storage and use. Recommended handling procedures are provided in the Material Safety Data Sheet, which is available from your local 3M representative upon request.

Materials Compatibility

In practice, Novec fluids differ somewhat from PFCs and PFPEs in their ability to dissolve certain oils. This means that Novec 7600 fluid is more likely to extract plasticizers from elastomeric materials. For this reason, elastomeric O-ring and seal materials should be limited to those that contain a low amount of plasticizer. EPDM, EPR and butyl typically fall into this category. 3M engineers can suggest appropriate compounds or assist with test procedures.

Heater Selection

The critical heat flux of Novec 7600 fluid, like similar Novec fluids, lies in the range of 15W/cm²-20W/cm² when boiling from a horizontal 0.5mm diameter platinum wire in a quiescent pool of saturated fluid. The maximum heat flux obtainable in forced convection applications is significantly higher, depending largely on the geometry and flow conditions. A safety interlock between the pump and heater is strongly recommended in applications with heat fluxes approaching 15W/cm².

Regulatory Status

Novec 7600 fluid has been approved by new chemical notification authorities in both Japan and Korea. Notifications are underway in Europe and the United States. Contact your local 3M representative regarding the regulatory status of Novec 7600 fluid in other countries.

Recycle and Disposal Options

Used Fluid Return Program

3M offers a program for free pickup and return of used 3M specialty fluids in the U.S. A pre-negotiated handling agreement between users and our authorized service provider offers users broad protection against future liability for used 3M product. The fluid return program is covered by independent third-party financial and environmental audits of treatment, storage and disposal facilities. Necessary documentation is provided. A minimum of 30 gallons of used 3M specialty fluid is required for participation in this free program.

For additional information on the 3M Used Fluid Return Program, contact your local 3M representative or call 3M Customer Service at 800.810.8513.

Resources

3M™ Novec™ Engineered Fluids are supported by global sales, technical and customer service resources, with technical service laboratories in the U.S., Europe, Japan, Latin America and Southeast Asia. Users benefit from 3M's broad technology base and continuing attention to product development, performance, safety and environmental issues. For additional technical information on 3M™ Novec™ 7600 Engineered Fluid in the United States or for the name of a local authorized distributor, call 3M Electronics Markets Materials Division: **800 810 8513**.

The 3M™ Novec™ Brand Family

The Novec brand is the hallmark for a variety of patented 3M products. Although each has its own unique formula and performance properties, all Novec products are designed in common to address the need for safe, effective, sustainable solutions in industry-specific applications. These include precision and electronics cleaning, heat transfer, fire protection, lubricant deposition and several specialty chemical applications.

3M™ Novec™ Engineered Fluids • 3M™ Novec™ Aerosol Cleaners • 3M™ Novec™ 1230 Fire Protection Fluid • 3M™ Novec™ Electronic Coatings • 3M™ Novec™ Electronic Surfactants

United States	China	Europe	Japan	Korea	Singapore
3M Electronics Markets Materials Division 800 810 8513	3M China Ltd. 86 21 6275 3535	3M Belgium N.V. 32 3 250 7521	Sumitomo 3M Limited 813 3709 8250	3M Korea Limited 82 2 3771 4114	3M Singapore Pte. Ltd. 65 64508888

Product Use: All statements, technical information and recommendations contained in this document are based on tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

Warranty and Limited Remedy: Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

Limitation Of Liability: Except where prohibited b.incidental, or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Electronics Markets Materials Division

3M Center, Building 224-3N-11
St. Paul, MN 55144-1000
www.3M.com/novec
1-800-810-8513

Please recycle. Printed in USA.
Issued: 9/09 © 3M 2009.
All rights reserved. 7011HB
60-5002-0178-9

3M and Novec are trademarks of 3M Company.
Used under license by 3M subsidiaries and affiliates.